


DTS 501

Samobušeci vijak sa šestorokutnom glavom i vulkaniziranom podloškom

- Za spajanje limova na metalnu konstrukciju

- Debljina bušenja lima maksimalno od 4,5 - 6 mm

ZN
ZN / RAL
PROTECT 1000™
BI - METAL
INOX

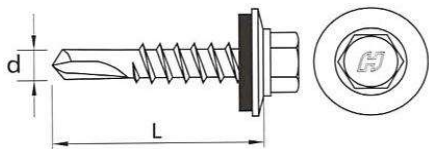

ZN

L \ D	Ø4,8	Ø5,5	Ø6,3
16	o		
19	o	o	o
22	o	o	o
25	o	o	o
32	o	o	o
35	o		
38	o	o	o
45	o	o	
50		o	o
55		o	
63		o	o
75		o	o

L \ D	Ø4,8	Ø5,5	Ø6,3
16	o		
19	o	o	o
22	o	o	o
25	o	o	o
32	o	o	o
35	o		
38	o	o	o
45	o	o	
50		o	o
55		o	
63		o	o
75		o	o

INOX - AISI 410




L \ D	Ø4,8	Ø5,5
16	o	
19	o	o
22	o	o
25	o	o
32		o
35	o	
38		o
45		o
50		o

PROTECT 1000™



L \ D	Ø5,5
25	o

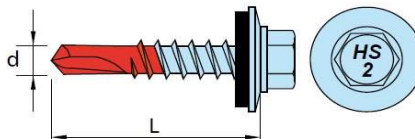

BI - METAL AISI 304



L \ D	Ø5,5
25	o
32	o
38	o
50	o