


DTS 504

Samobušeci vijak sa šesterokutnom glavom i
i vulkaniziranom inox podloškom

- Za spajanje panela na metalnu konstrukciju
- Debljina bušenja cjevi maksimalno do 6 mm;



PROTECT 1000™
BI - METAL

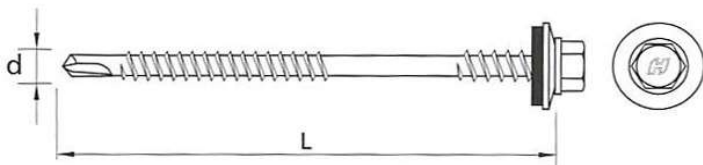

PROTECT 1000™



L \ D	Ø5,5	PL Ø	G _{min}	G _{max}
80	○	16 / A2	30	60
90	○	16 / A2	40	70
98	○	16 / A2	50	80
110	○	16 / A2	55	90
120	○	16 / A2	45	100
130	○	19 / A2	50	110
150	○	19 / A2	70	130
160	○	19 / A2	80	140
175	○	19 / A2	95	155
195	○	19 / A2	115	175
210	○	19 / A2	130	190
230	○	19 / A2	170	210
240	○	19 / A2	180	220
250	○	19 / A2	190	230
275	○	19 / A2	210	255
330	○	19 / A2	260	310

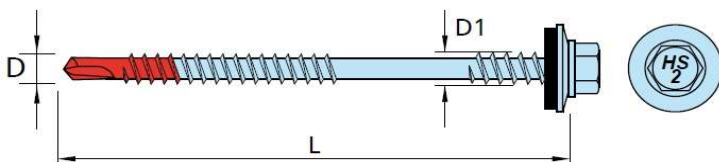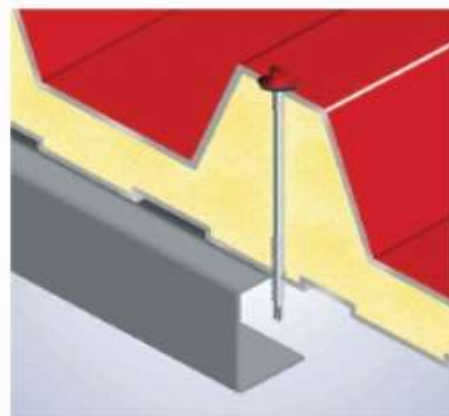

BI - METAL - AISI 304



L \ D	Ø5,5	PL Ø	G _{min}	G _{max}
98	○	16 / A2	50	80
110	○	16 / A2	55	90
130	○	19 / A2	50	110
150	○	19 / A2	70	130
175	○	19 / A2	95	155
195	○	19 / A2	115	175
230	○	19 / A2	170	210
250	○	19 / A2	190	230