


HRN M.B1.272
DIN 915 / 45H
ISO 4028
UNI 5925

Uvrtni imbus vijak sa manjim cilindričnim završetkom

FE
ZN

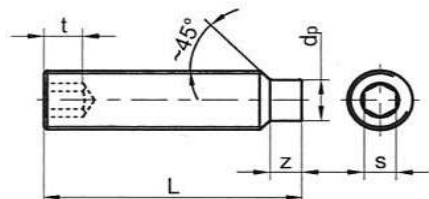

	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16	M 20	M 24
d_p	2	2.5	3.5	4	5.5	7	8.5	10	12	15	18
z	1.75	2.25	2.75	3.25	4.3	5.3	6.3	7.36	8.36	10.36	12.43
t	1.2	1.5	2	2	3	4	4.8	5.6	6.4	8	10
s	1.5	2	2.5	3	4	5	6	6	8	10	12

L \ D	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16	M 20	M 24
3	○										
4	○	○	○								
5	○	○	○	○							
6	○	○	○	○	○						
8	○	○	○	○	○	○					
10	○	○	○	○	○	○	○				
12	○	○	○	○	○	○	○				
14	○	○	○	○	○	○	○				
16	○	○	○	○	○	○	○		○		
18	○	○	○	○	○	○	○		○		
20	○	○	○	○	○	○	○	○	○	○	
25		○	○	○	○	○	○	○	○	○	
30		○	○	○	○	○	○	○	○	○	○
35		○	○	○	○	○	○	○	○	○	○
40		○	○	○	○	○	○	○	○	○	○
45			○	○	○	○	○		○	○	○
50				○	○	○	○		○	○	○
60					○	○	○		○	○	○
70					○	○	○		○	○	○
80					○	○	○		○	○	○
90										○	○
100											○