

DTS 502

Samobušeci vijak sa šesterokutnom glavom i vulkaniziranom podloškom

- Za spajanje limova na čeličnu konstrukciju



- Debljina bušenja čelika 4 - 20 mm

ZN

ZN / RAL

PROTECT 1000™

BI - METAL

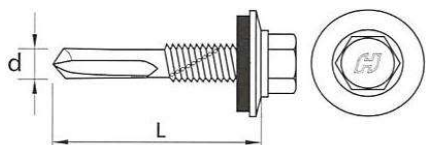


ZN

$\frac{D}{L}$	$\varnothing 5,5$
35	○
38	
50	○
67	○
75	○

PL Ø
14
14
14
14
14

PROTECT 1000™




$\frac{D}{L}$	$\varnothing 5,5$
32	○
35	○
38	○
50	○
67	○
75	○

PL Ø
14
14
14
14
14
14

$\frac{D}{L}$	$\varnothing 5,5$
38	○
35	○

PL Ø
14
14

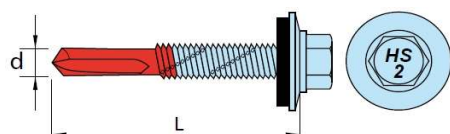

BI - METAL - AISI 304



$\frac{D}{L}$	$\varnothing 5,5$
38	○
50	○
75	○

PL Ø
14
14
14