
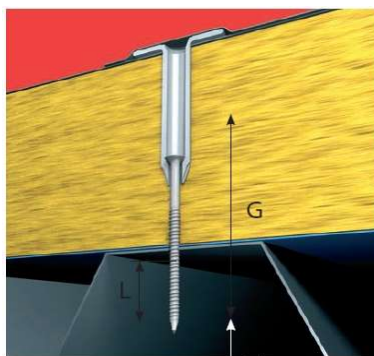



- Za pričvršćenje izolacije na ravnim krovovima

- Koristi se sa teleskopskom izolacijskom tiplom DTS 515 S



L	D	Ø 4,8
50		o
60		o
70		o
80		o
90		o
100		o
120		o
140		o
160		o
180		o
200		o
240		o
250		o
300		o

Insulation thickness G (mm)	DTS 515 L (mm)	Steel substrate S280GD	Wooden substrate ≥ C24		Concrete substrate ≥ C20/25	
		DTS 516 S L ₁ (mm)	Screw length L ₁ (mm)	Effective embedment depth h _{ef} (mm)	DTS 516 U L ₁ (mm)	Effective embedment depth h _{ef} (mm)
		Round type				
50	35	50			55	
60	35	60			65	
70	35	70			85	
80	60	60			65	
90	60	70			85	
100	60	80			85	
110	85	60			65	
120	95	60			65	
130	105	60			65	
140	115	60			65	
150	115	70			85	
160	135	60			65	
170	145	60			65	
180	145	70	80	20	85	30
190	165	60			65	
200	165	70			85	
210	185	60			65	
220	185	70			85	
230	185	80			85	
240	215	60			65	
250	215	70			85	
260	235	60			65	
300	285	50			55	
350	325	60			65	
410	385	60			65	
460	435	60			65	
560	535	60			65	
		Oval type				
80	65	50				
100	65	70	80			
120	65	100	100	20		
150	65	120	-			

